



## CASCADES CLADDING

### CASCADES CLADDING

Named for the nearby Cascades mountain range and made from the Pacific Northwest's regional Red Alder, Cascades Cladding is comprised of three thicknesses in a tongue and groove profile. With rounded edges and a silky-smooth face, the cladding is available in 10 translucent colors which allow the natural features to shine through.

### DIMENSIONS

1/2", 5/8" and 3/4" thick x 3" wide

Loose sticks are 2' - 6' random lengths

Six standard panel sizes:

- 18" x 18" (full length sticks)
- 18" x 36" (full length sticks)
- 36" x 36" (full length sticks)
- 18" x 54" (random length sticks)
- 18" x 90" (random length sticks)
- 24" x 96" (random length sticks)

### MATERIAL AND SURFACE

Red Alder (FSC mixed credit)

Janka hardness scale 590

Tongue and groove profile

Open knots allowed up to 3/8" and not filled

### FINISHES / ADHESIVES

Low VOC waterborne clear coat, 66 g/L

Stain VOC: 7 g/L Bone and Dove

Stain VOC: 0 g/L Citrine, Monarch, Earthen,

Sage, Slate, Auburn, Espresso and Raven

Sheen: Dead Flat 120

Adhesive VOC: 0 g/L (NAUF compliant)

### FIRE RATING

Class C as-is in native form, Class A and B

Available upon request

### SEISMIC RATING

Available upon request



Cascades Cladding: Dove

### POTENTIAL LEED CREDITS

Materials & Resources Credit 5: Regional Materials (500 mi of Tumwater, WA)

Materials & Resources Credit 7: Certified Wood

Indoor Environmental Quality Credit 4.2: Low-emitting Materials - Paints & Coatings

FSC CHAIN OF CUSTODY SA-COC-002372-3




The mark of responsible forestry  
FSC® C041262



# CASCADES CLADDING


## STAIN OPTIONS




CLEAR




DOVE




BONE




CITRINE




MONARCH




EARTHEN




SAGE




SLATE




AUBURN



ESPRESSO



RAVEN

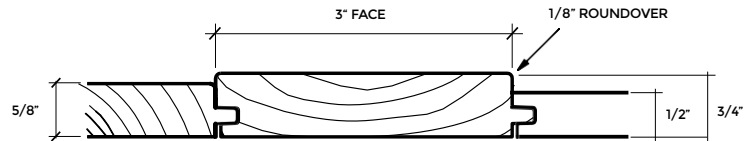

## SAMPLES

Please Contact Us for your request or make your request at [windfall.design](http://windfall.design)

## LEAD TIME

3-5 weeks depending on area, and ship date provided upon order

## MOQ

No Minimum Order Quantity




# CASCADES CLADDING

## INSTALLATION METHODS



Tongue + groove cladding (loose sticks) Traditional install with nails + adhesive

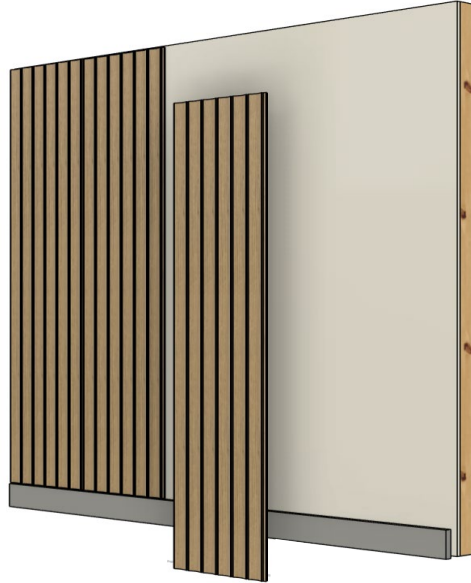


Panels installed using fixed mounted fastener



Cambio by Windfall Panels Installed with patented magnetic Wall System

## DESIGN YOUR WALL

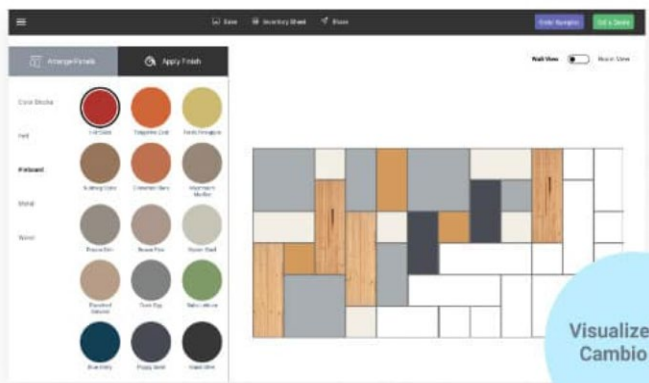

USE OUR VISUALIZER TOOL TO DESIGN YOUR WALL. RECEIVE AN INVENTORY LIST, SEND TO OUR TEAM FOR A QUOTE.