



MULTI-LEVEL WALL CLADDING

MULTI-LEVEL WALL CLADDING

Multi-Level Wall Cladding is made from Douglas fir and Hemlock reclaimed from solid and glue laminated beams and lumber. These are taken from deconstructed industrial, agricultural, and residential buildings in the Pacific Northwest. Multi-Level Wall material comes in three thicknesses, 1/2", 5/8" and 3/4", giving it a dimensional look. Designed with tongue and groove edges for easy installation with standard tools and techniques.

DIMENSIONS

1/2", 5/8" and 3/4" thick x 3-1/2" face

Six standard panel sizes:

- 18" x 18" (full length sticks)
- 18" x 36" (full length sticks)
- 36" x 36" (full length sticks)
- 18" x 54" (random length sticks)
- 18" x 90" (random length sticks)
- 24" x 96" (random length sticks)



Multi-Level Wall: Warm Brown | KPG Architects, Seattle, WA

MATERIAL AND SURFACE

Reclaimed Douglas Fir and Hemlock

Janka hardness scale 540-710

Smooth face

Tongue and groove edges, round over on thicker two profiles

Standard reclaimed marks (nail holes, ferrous staining, glue lines, and occasional bolt holes) will be apparent

Voids, checked knots and small cracks between 1/8" - 1/2" can be expected

FINISHES / ADHESIVES

Low VOC waterborne clear coat, 66 g/L

Stain VOC: 7 g/L

Sheen: Semi-Gloss 104

Adhesive VOC: 0 g/L (NAUF compliant)

FIRE RATING

Class C as-is in native form, Class A and B

Available upon request

SEISMIC RATING

Available upon request

POTENTIAL LEED CREDITS

Materials & Res. Credit 3: Materials Reuse

Materials & Res. Credit 4: Recycled Content

Materials & Res. Credit 5: Regional Materials (500 mi of Tumwater, WA)

Materials & Res. Credit 7: Certified Wood

Indoor Environmental Quality Credit 4.1: Low-emitting Materials - Adhesives

Indoor Environmental Quality Credit 4.2: Low-emitting Materials - Paints & Coatings

FSC CHAIN OF CUSTODY SA-COC-002372-3



The mark of responsible forestry
FSC® C041262



MULTI-LEVEL WALL CLADDING

STAIN COLORS




Clear



Cascadian
Brown




Warm Brown




Anthracite



Umber




Chestnut



Leather



Ebony

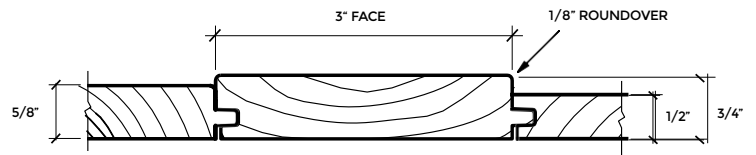

SAMPLES

Please Contact Us for your request or make your request at windfall.design

LEAD TIME

3-5 weeks depending on area, and ship date provided upon order

MOQ

No Minimum Order Quantity




MULTI-LEVEL WALL CLADDING

INSTALLATION METHODS



Tongue + groove cladding (loose sticks) Traditional install with nails + adhesive

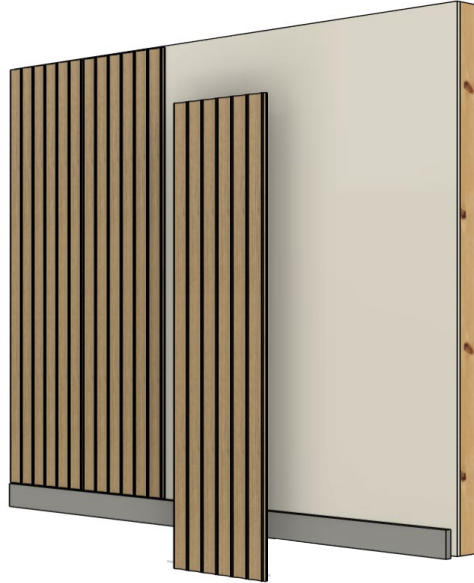


Panels installed using fixed mounted fastener



Cambio by Windfall Panels Installed with patented magnetic Wall System

DESIGN YOUR WALL

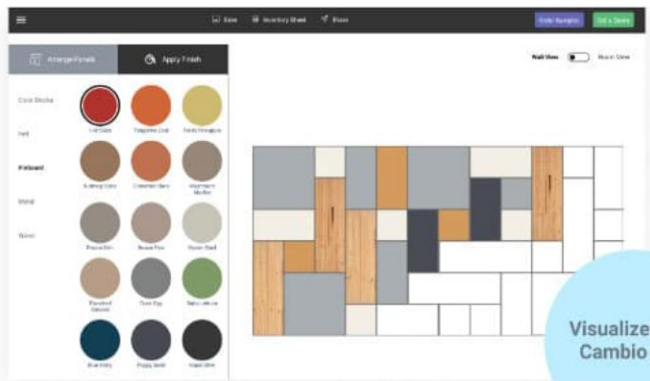

USE OUR VISUALIZER TOOL TO DESIGN YOUR WALL. RECEIVE AN INVENTORY LIST, SEND TO OUR TEAM FOR A QUOTE.