



WAVE

WAVE

The Wave profile celebrates soft movement in a wall cladding, designed for sophisticated venues where soft light can reflect off the curves and valleys in the profile. Offered in stick cladding or panels. The Wave profile can be installed vertically or horizontally used in wainscoting, bar front, accent and feature walls, elevator lobbies and more.

DIMENSIONS

Single Stave 4 1/2" wide x 3/4" thick

Loose 96" sticks long

Six standard panel sizes:

- 18" x 18"
- 18" x 36"
- 36" x 36"
- 18" x 54"
- 18" x 90"
- 24" x 96"

MATERIAL AND SURFACE

Solid White Oak, Eastern Black Walnut, American Beech, American Cherry, Red Alder or CARB-II COMPLIANT/NAUF Medium Density Fiberboard

POTENTIAL LEED CREDITS

Materials & Resources Credit 5: Regional Materials (500 mi of Tumwater, WA)

Materials & Resources Credit 7: Certified Wood

Indoor Environmental Quality Credit 4.2: Low-emitting Materials - Paints & Coatings

FSC CHAIN OF CUSTODY SA-COC-002372-3 when available



Wave White Flour

FINISHES / ADHESIVES

Low VOC waterborne clear coat, 66 g/L Sheen: Matte 106

CARB-II COMPLIANT/NAUF Medium Density Fiberboard backer

FIRE RATING

Class A and B fire-rating available upon request

SEISMIC RATING

Available upon request

SAMPLES

Please Contact Us for your request or make your request at windfall.design

LEAD TIME

3-5 weeks depending on area, and ship date provided upon order

MOQ

No Minimum Order Quantity





WAVE


WOOD SPECIES



WHITE OAK




EASTERN BLACK
WALNUT



AMERICAN
BEECH




AMERICAN
CHERRY



RED ALDER

PAINTED MDF




TRICORN BLACK



SERIOUS GRAY




GRAY MATTERS



WHITE FLOUR



CUSTOM SW
PAINT

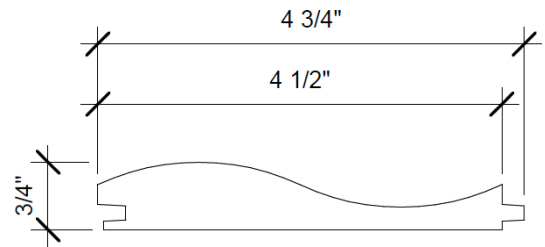

DISCLAIMER: Since wood is a natural material, there are variations, including knots, texture and grain from piece to piece. The wood used may vary from the wood used in samples or product photography due to the inherent characteristics of the material. In turn, no representation, warranty and/or guarantee is made with respect to the precise color, luster or appearance of finishes.

Contact Us: sales@windfall.design | www.windfall.design




The mark of
responsible forestry
FSC® C041262



Wave INSTALLATION METHODS

STICKS

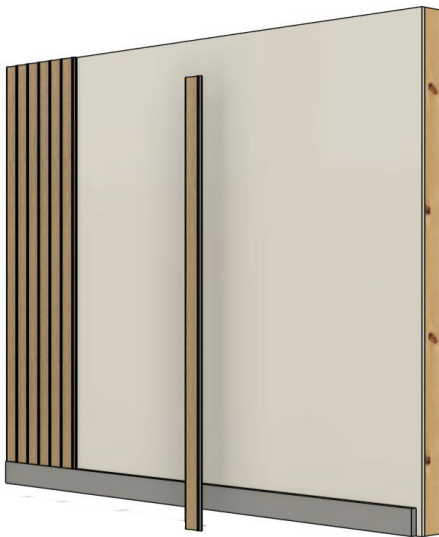

Tongue + groove cladding
(loose sticks) Traditional install
with nails + adhesive

PANELS




Panels installed using
fixed mounted fastener

CAMBIO PANELS



Cambio by Windfall panels
Installed with patented
magnetic wall system.

DESIGN YOUR WALL

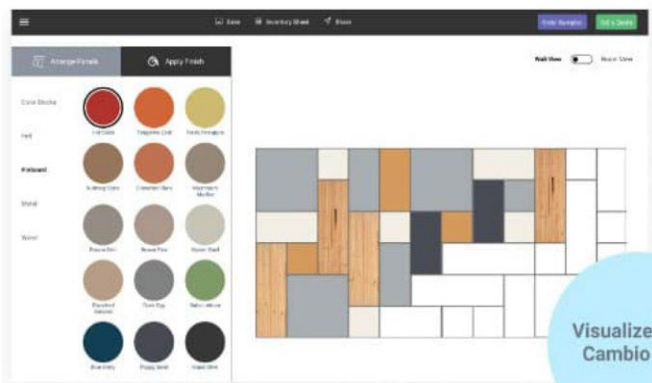

USE OUR VISUALIZER TOOL TO DESIGN
YOUR WALL. RECEIVE AN INVENTORY LIST,
SEND TO OUR TEAM FOR A QUOTE.

Contact Us: sales@windfall.design | www.windfall.design



The mark of
responsible forestry
FSC® C041262