



SABI CLADDING

SABI CLADDING

The Sabi Collection is comprised of four distinct finishes and textures inspired by the Japanese philosophy of Wabi Sabi, the aesthetic of imperfect beauty. Sabi wall cladding is made of Douglas fir and Hemlock reclaimed from solid and glue laminated beams and lumber.

DIMENSIONS

1/2" thick x 4 1/2" wide

Loose sticks are 2' - 8' random lengths

Six standard panel sizes:

- 18" x 18" (full length sticks)
- 18" x 36" (full length sticks)
- 36" x 36" (full length sticks)
- 18" x 54" (random length sticks)
- 18" x 90" (random length sticks)
- 24" x 96" (random length sticks)



Cladding: Weather | Embers Entertainment Offices, Seattle, WA

MATERIAL AND SURFACE

Reclaimed Douglas Fir and Hemlock

Janka hardness scale 540-710

Resawn face or Resawn Skip-face

Tongue and groove profile with straight edges
Standard reclaimed marks (nail holes, ferrous staining, glue lines, and occasional bolt holes) will be apparent. May include aluminum metal shavings or staples.

Voids allowed up to 1/8" and are not filled

FINISHES / ADHESIVES

Low VOC waterborne clear coat, 66 g/L

Stain VOC: 23 g/L

Sheen: Dead Flat 120

Adhesive VOC: 0 g/L (NAUF compliant)

FIRE RATING

Class C as-is in native form, Class A and B

Available upon request

SEISMIC RATING

Available upon request

POTENTIAL LEED CREDITS

Materials and Resources 3: Materials Reuse

Materials and Resources 4: Recycled Content

Materials and Resources Credit 5:
Regional Materials (500 mi of Tumwater, WA)

Materials and Resources Credit 7: Certified Wood

Indoor Environmental Quality Credit 4.1: Low-emitting Materials-Adhesives

Indoor Environmental Quality Credit 4.2: Low-emitting Materials-Paints and Coatings

FSC CHAIN OF CUSTODY SA-COC-002372-3
when available

Contact Us: sales@windfall.design | www.windfall.design



The mark of
responsible forestry
FSC® C041262



SABI CLADDING


STAIN COLORS



WEATHER





CHAR



SHOJI



LOTUS

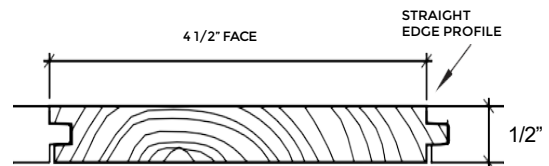

SAMPLES

Please Contact Us for your request or make your request at windfall.design

LEAD TIME

3-5 weeks depending on area, and ship date provided upon order

MOQ

No Minimum Order Quantity

DISCLAIMER: Since wood is a natural material, there are variations, including knots, texture and grain from piece to piece. The wood used may vary from the wood used in samples or product photography due to the inherent characteristics of the material. In turn, no representation, warranty and/or guarantee is made with respect to the precise color, luster or appearance of finishes.

Contact Us: sales@windfall.design | www.windfall.design



The mark of
responsible forestry
FSC® C041262




Sabi Cladding INSTALLATION METHODS

STICKS



Tongue + groove cladding
(loose sticks) Traditional install
with nails + adhesive

PANELS

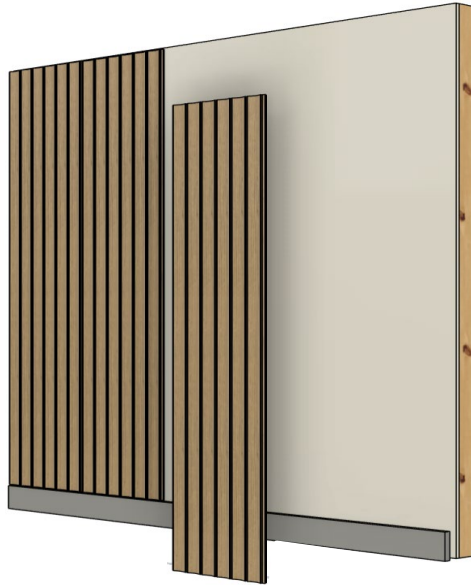


Panels installed using
fixed mounted fastener

CAMBIO PANELS



Cambio by Windfall panels
Installed with patented
magnetic wall system.

DESIGN YOUR WALL

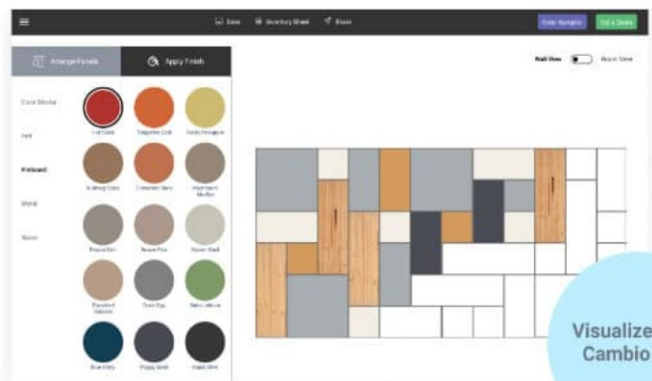

USE OUR VISUALIZER TOOL TO DESIGN
YOUR WALL. RECEIVE AN INVENTORY LIST,
SEND TO OUR TEAM FOR A QUOTE.

Contact Us: sales@windfall.design | www.windfall.design



The mark of
responsible forestry
FSC® C041262