



STICKS, PANELS OR CAMBIO PANELS ACCLIMATION & INSTALLATION

Storage and Acclimation


To maintain good condition, all products shall be stored flat and protected from impacts, falls, and spillage, with special attention paid to the edges and corners.

Products must be stored in a dry state and protected from weather during storage. The products must be stored flat in a sealed, waterproof envelope on a smooth level surface clear of the ground and away from exposure to water, moisture, temperature extremes, etc.

Products for interior use must be properly acclimated for a minimum of 7 days in the environment in which they are to be installed. Proper acclimation requires an enclosed installation area where the wet-work has been completed, and the HVAC system is operating and maintaining temperature between 60- and 90-degrees F and relative humidity between 18 and 55 percent. The products must be acclimated in the “stacked & stickered” format for proper air circulation (see diagram). Pay special attention to maintaining the flatness of the material while it is being stored and acclimated.

The most important factor for moisture at installation is enough acclimation time in the same space where the product will be installed so the wood can come to a stasis with the conditions of the space.

STACKING AND STICKERING

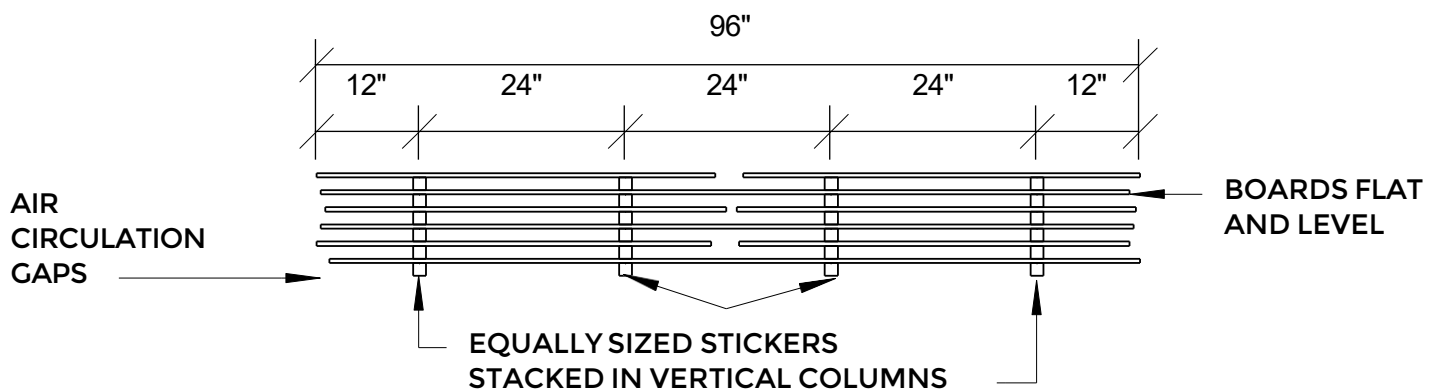

Windfall cannot be held responsible for products that are installed incorrectly or without proper acclimation.



Pre-installation Information

- Windfall strongly recommends that our wood sticks and panel products be installed by a licensed and bonded general contractor (GC) in accordance with industry best practices and our installation recommendations. Windfall is not responsible for damages caused by incorrect installation of our products
- Cambio by Windfall Panels can be installed by General Contractors (GC), building owners and Facility Managers.
- Tongue and groove (T&G) cladding products should be installed with a combination of blind nailing and minimal face nailing with appropriate fasteners for the best appearance.
- Select fasteners which will protrude into the wall studs or furring strips at least 1-1/2" and in a gauge which will not cause excessive splitting.

Magnet Disclaimer

Cambio Panels use embedded magnets. We recommend keeping devices such as cell phones, medical implants, etc. at least 12" away from the back of the Cambio panels. There is no risk to devices that touch or are close to the face of the Cambio panels. If customizing panel(s), do not cut through magnets.

Install

Solid wood Sticks and Panel products must be installed in a way that allows for expansion and contraction over time. Sticks can be installed with finish nails or staples are preferred, but spot application of construction adhesive can be used where nailing is not possible.

Panels must be fastened with a screw and washer going through an oversize hole in the mounting surface. Screws should not go more than 1/2" into the product and should be pre-drilled. Allow for the wood to move using whatever installation method you choose (i.e., French cleats, fastened through face into studs, or biscuiting).

Felt with wood products can be mounted two ways. Fastened with pan head screws (min 1- 3/8" long) going through the felt into stud or by using glue and pins

Cambio Panels are installed with starter ledge is to length, adjust if necessary, and install on wall with screws at least every stud or 12"-16" apart, making sure it is level. The Starter Ledge is the reference point for the remainder of the installation and ensures the panels are level/plum when placed on the wall. Install provided metal rails with provided screws. *See Cambio Installation Guide for full instructions.



Finishes

Finished- This product has been finished with a low VOC waterborne topcoat. There are 2 coats on the face and 1 coat on the back to seal the panel. Do not apply harsh or toxic cleaners and applicants to this product.

Unfinished- This product has not been finished. If finishing, we recommend the use of a professional finishing company with knowledge of the application of waterborne finishes. When finishing, always make sure to apply a coat of finish on the back of the panel to seal the wood.

Warranty

We stand behind our products.

Windfall warranty products for 1 year for workmanship, including construction and finish quality....and they last for many years beyond.

We carefully manufacture and package our products for shipment and expect our customers to care for them prior to and during installation. Customers are responsible for storing their Windfall products in such a way that they maintain the recommended moisture content after delivery.

Windfall is not responsible for costs, claims, expenses, liabilities, or problems relating to or resulting from storage, site conditions, installation, or maintenance of Windfall products.

Windfall will not be responsible for any costs, damages, expenses, or liabilities associated with removal or reinstallation of products.

All Windfall products are sold as is.

Windfall cannot be held responsible for products that are installed incorrectly or without proper acclimation.