



CASCADES CLADDING

CASCADES CLADDING

Named for the nearby Cascades mountain range and made from the Pacific Northwest's regional Red Alder, Cascades Cladding is comprised of three thicknesses in a tongue and groove profile. With rounded edges and a silky-smooth face, the cladding is available in 10 translucent colors which allow the natural features to shine through.

DIMENSIONS

1/2", 5/8" and 3/4" thick x 3" wide

Loose sticks are 2' - 6' random lengths

Six standard panel sizes:

- 18" x 18" (full length sticks)
- 18" x 36" (full length sticks)
- 36" x 36" (full length sticks)
- 18" x 54" (random length sticks)
- 18" x 90" (random length sticks)
- 24" x 96" (random length sticks)

MATERIAL AND SURFACE

Red Alder (FSC mixed credit)

Janka hardness scale 590

Tongue and groove profile

Open knots allowed up to 3/8" and not filled

FINISHES / ADHESIVES

Low VOC waterborne clear coat, 66 g/L

Stain VOC: 7 g/L Bone and Dove

Stain VOC: 0 g/L Citrine, Monarch, Earthen,

Sage, Slate, Auburn, Espresso and Raven

Sheen: Dead Flat 120

Adhesive VOC: 0 g/L (NAUF compliant)

FIRE RATING

Class C as-is in native form, Class A and B

Available upon request

SEISMIC RATING

Available upon request



Cascades Cladding: Dove

POTENTIAL LEED CREDITS

Materials & Resources Credit 5: Regional Materials (500 mi of Tumwater, WA)

Materials & Resources Credit 7: Certified Wood

Indoor Environmental Quality Credit 4.2: Low-emitting Materials - Paints & Coatings

FSC CHAIN OF CUSTODY SA-COC-002372-3 when available

Contact Us: sales@windfall.design | www.windfall.design




The mark of responsible forestry
FSC® C041262



CASCADES CLADDING


STAIN OPTIONS




CLEAR




DOVE




BONE




CITRINE




MONARCH




EARTHEN




SAGE




SLATE




AUBURN



ESPRESSO



RAVEN

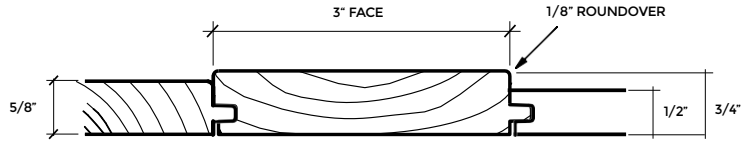

SAMPLES

Please Contact Us for your request or make your request at windfall.design

LEAD TIME

3-5 weeks depending on area, and ship date provided upon order

MOQ

No Minimum Order Quantity

DISCLAIMER: Since wood is a natural material, there are variations, including knots, texture and grain from piece to piece. The wood used may vary from the wood used in samples or product photography due to the inherent characteristics of the material. In turn, no representation, warranty and/or guarantee is made with respect to the precise color, luster or appearance of finishes.

Contact Us: sales@windfall.design | www.windfall.design




The mark of responsible forestry
FSC® C041262




Cascades Cladding INSTALLATION METHODS

STICKS

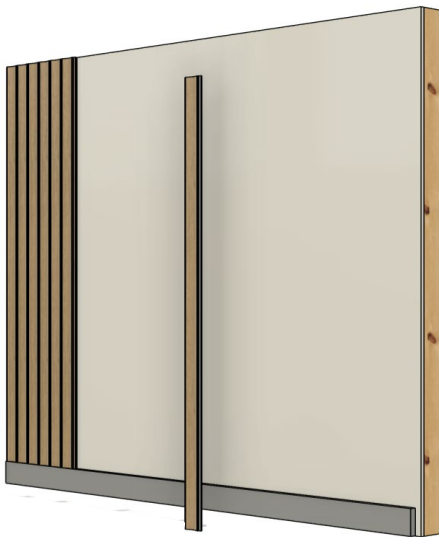

Tongue + groove cladding (loose sticks) Traditional install with nails + adhesive

PANELS

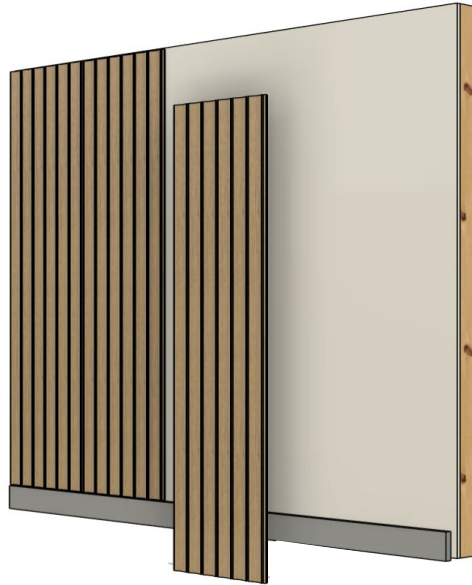


Panels installed using fixed mounted fastener

CAMBIO PANELS



Cambio by Windfall panels Installed with patented magnetic wall system.

DESIGN YOUR WALL

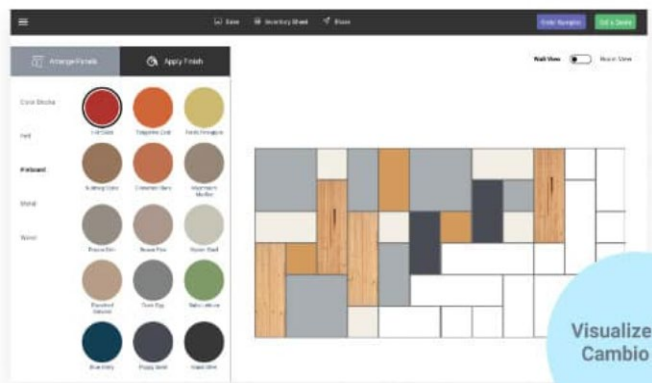

USE OUR VISUALIZER TOOL TO DESIGN YOUR WALL. RECEIVE AN INVENTORY LIST, SEND TO OUR TEAM FOR A QUOTE.

Contact Us: sales@windfall.design | www.windfall.design



The mark of responsible forestry
FSC® C041262