



# MULTI-LEVEL WALL CLADDING

## MULTI-LEVEL WALL CLADDING

Multi-Level Wall Cladding is made from Douglas fir and Hem- lock reclaimed from solid and glue laminated beams and lumber. These are taken from deconstructed industrial, agricultural, and residential buildings in the Pacific Northwest. Multi-Level Wall material comes in three thicknesses, 1/2", 5/8" and 3/4", giving it a dimensional look. Designed with tongue and groove edges for easy installation with standard tools and techniques.

## DIMENSIONS

1/2", 5/8" and 3/4" thick x 3-1/2" face

Six standard panel sizes:

- 18" x 18" (full length sticks)
- 18" x 36" (full length sticks)
- 36" x 36" (full length sticks)
- 18" x 54" (random length sticks)
- 18" x 90" (random length sticks)
- 24" x 96" (random length sticks)



Multi-Level Wall: Warm Brown | KPG Architects, Seattle, WA

## MATERIAL AND SURFACE

Reclaimed Douglas Fir and Hemlock  
Janka hardness scale 540-710  
Smooth face  
Tongue and groove edges, round over on thicker two profiles  
Standard reclaimed marks (nail holes, ferrous staining, glue lines, and occasional bolt holes) will be apparent. May include aluminum metal shavings or staples  
Voids, checked knots and small cracks between 1/8" - 1/2" can be expected

## FINISHES / ADHESIVES

Low VOC waterborne clear coat, 66 g/L  
Stain VOC: 7 g/L  
Sheen: Semi-Gloss 104  
Adhesive VOC: 0 g/L (NAUF compliant)

## FIRE RATING

Class C as-is in native form, Class A and B Available upon request

## SEISMIC RATING

Available upon request

## POTENTIAL LEED CREDITS

Materials & Res. Credit 3: Materials Reuse

Materials & Res. Credit 4: Recycled Content

Materials & Res. Credit 5: Regional Materials (500 mi of Tumwater, WA)

Materials & Res. Credit 7: Certified Wood

Indoor Environmental Quality Credit 4.1: Low-emitting Materials - Adhesives

Indoor Environmental Quality Credit 4.2: Low-emitting Materials - Paints & Coatings

FSC CHAIN OF CUSTODY SA-COC-002372-3 when available

Contact Us: sales@windfall.design | www.windfall.design



The mark of responsible forestry  
FSC® C041262



# MULTI-LEVEL WALL CLADDING

## STAIN COLORS




Clear



Cascadian  
Brown



Warm Brown




Anthracite



Umber




Chestnut



Leather



Ebony



## SAMPLES

Please Contact Us for your request or make your request at [windfall.design](http://windfall.design)

## LEAD TIME

3-5 weeks depending on area, and ship date provided upon order

## MOQ

No Minimum Order Quantity

DISCLAIMER: Since wood is a natural material, there are variations, including knots, texture and grain from piece to piece. The wood used may vary from the wood used in samples or product photography due to the inherent characteristics of the material. In turn, no representation, warranty and/or guarantee is made with respect to the precise color, luster or appearance of finishes.

Contact Us: [sales@windfall.design](mailto:sales@windfall.design) | [www.windfall.design](http://www.windfall.design)




The mark of  
responsible forestry  
FSC® C041262




# Multi-Level Wall Cladding **INSTALLATION METHODS**

## STICKS

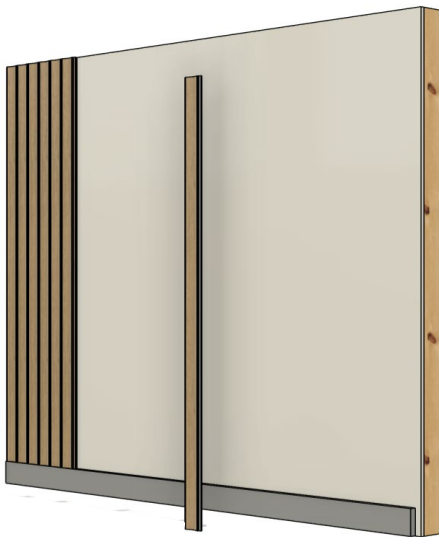

Tongue + groove cladding (loose sticks) Traditional install with nails + adhesive

## PANELS

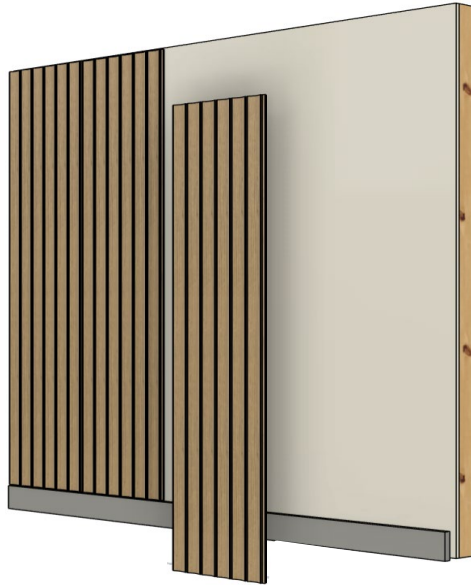


Panels installed using fixed mounted fastener

## CAMBIO PANELS



Cambio by Windfall panels Installed with patented magnetic wall system.

## DESIGN YOUR WALL

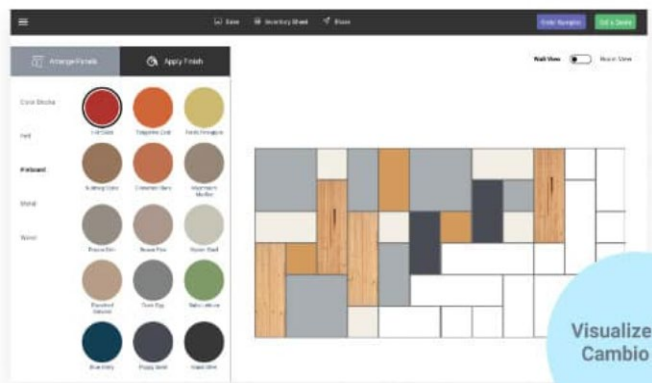

USE OUR VISUALIZER TOOL TO DESIGN YOUR WALL. RECEIVE AN INVENTORY LIST, SEND TO OUR TEAM FOR A QUOTE.

Contact Us: [sales@windfall.design](mailto:sales@windfall.design) | [www.windfall.design](http://www.windfall.design)



The mark of responsible forestry  
FSC® C041262